


KER15 Aluminum pump



Performance curve

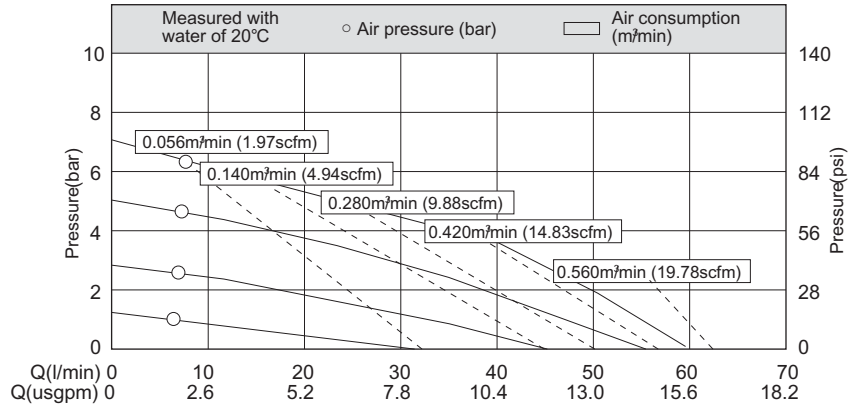

Technical parameters

Suction lift[mwc]	dry	4
	wet	7.6
Max particle diameter[mm]		2.5
Suction and discharge size[in]	1/2	3/4
Air inlet size[in]		3/8
Max flow[l/min]		57
Max head[m]		84
Max air inlet pressure[bar]		8.4


material quality

Pumpbody: Aluminum
Diaphragm: Santoprene, Hytel, Teflon, Viton, EPDM, Buna-N
Valve ball: Teflon, Stainless steel, Santoprene
Valve seat: SS304, SS316
Center block: PP

Weight

Aluminum pump: 4.5 Kgs

Installation size

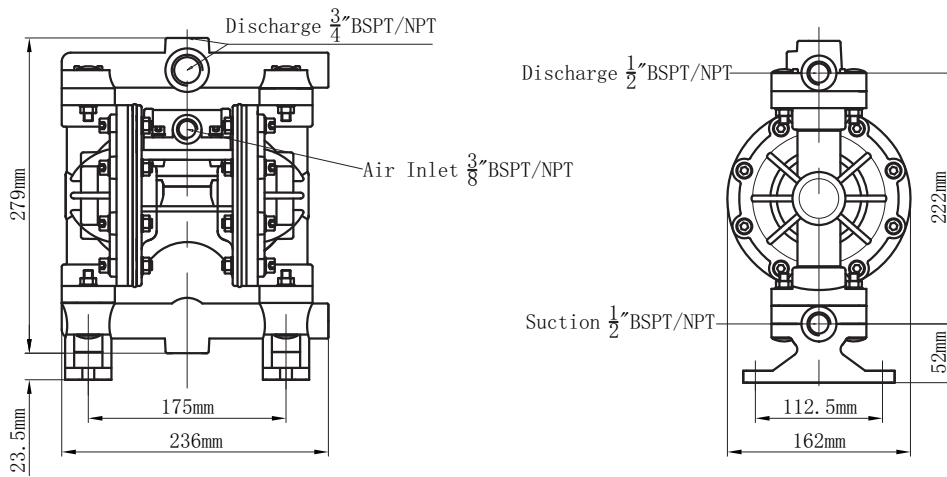



SINCE 1967

...together we achieve

EDR GROUP OF INDUSTRIES



AN ISO 9001 : 2008 COMPANY



SINCE 1973

Leak-Proof Pumps (I) Pvt. Ltd.

G - 1, LAXMI INDUSTRIAL ESTATE, NEW LINK ROAD, ANDHERI (WEST), MUMBAI - 400 053, INDIA.

FAX : 022 2632 0866 | PHONE : 022 2636 1737, 2635 2846, 2637 0337 • Website : www.rajediapumps.com • E-mail : rppl@rajediapumps.com

: Manufacturing Unit :

E - 1, EDR INDUSTRIAL ESTATE, PIROJPURA, NEAR CHHAPI, TALUKA VADGAM, DIST. BANASKANTHA, NORTH GUJARAT 385 210, INDIA

FAX : +91-02739 270 057 | PHONE : +91 02739 270151, 270152 • E-mail : mnfg@rajediapumps.com